


Pannelli in vetro di lancia



red dot award winner 2023

Performance linéaire garantie 30 ans

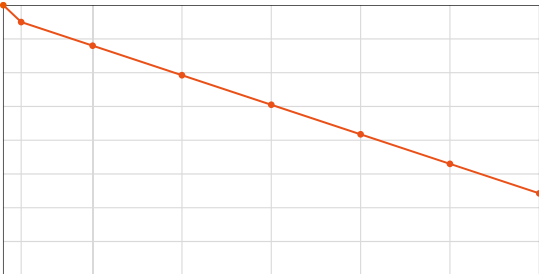

Caractéristiques électriques (STC: AM1.5 1000W/m² 25 °C NOCT: AM1.5 800W/m² 20 °C 1m/s)																								
Type de panneau	AIKO-A650-MDE72Dw			AIKO-A655-MDE72Dw			AIKO-A660-MDE72Dw			AIKO-A665-MDE72Dw			AIKO-A670-MDE72Dw			AIKO-A675-MDE72Dw			AIKO-A680-MDE72Dw			AIKO-A685-MDE72Dw		
Conditions d'essai	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI
P _{max} [W]	650	520	685	655	524	690	660	527	695	665	531	700	670	535	705	675	538	710	680	542	715	685	546	720
V _{oc} [V]	54.90	51.23	54.90	55.00	51.33	55.00	55.10	51.43	55.10	55.20	51.53	55.20	55.30	51.63	55.30	55.40	51.73	55.40	55.50	51.83	55.50	55.60	51.93	55.60
V _{mp} [V]	44.79	42.98	44.79	44.89	43.07	44.89	44.99	43.16	44.99	45.09	43.25	45.09	45.19	43.34	45.19	45.29	43.43	45.29	45.39	43.52	45.39	45.49	43.61	45.49
I _{sc} [A]	15.27	13.08	16.08	15.33	13.14	16.14	15.39	13.20	16.20	15.45	13.26	16.26	15.52	13.32	16.33	15.59	13.38	16.39	15.66	13.44	16.46	15.73	13.50	16.52
I _{mp} [A]	14.52	12.10	15.29	14.60	12.16	15.37	14.68	12.22	15.45	14.75	12.28	15.52	14.83	12.34	15.60	14.91	12.40	15.68	14.99	12.46	15.75	15.07	12.52	15.83
Rendement par panneau	24.1%			24.2%			24.4%			24.6%			24.8%			25.1%			25.2%			25.4%		

Spécification du produit

Type de cellule ABC, type N

Verre

Bi-v5.28 Tm0 g0 G[(15)1(-)] TETC /Span 4MCID 240/Laq67.08 543.84 203.52 102.84 reW* n2.8267 -0.0000 v0.0008267 -0.0002.12 a/F3 n/* ni3 6

